



插头 Plug

产品外观
Photo



外形尺寸
Dimension

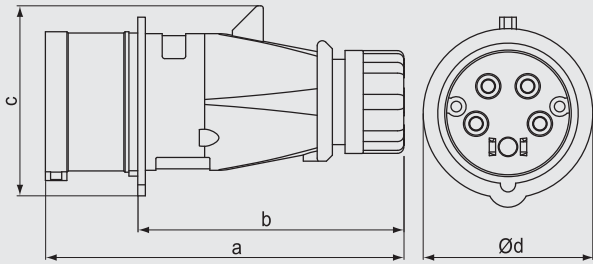

电流 Current	极数 Pole	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100- 300 Hz			>50 - 500 V a. 300- 500 Hz		
		3P 4h	4P 4h	5P 4h	3P 6h	4P 9h	5P 9h	3P 9h	4P 6h	5P 6h	3P 7h	4P 7h	5P 7h	3P 10h	4P 10h	5P 10h	3P 2h	4P 2h	5P 2h

△ IP 44 CEE / IEC 插头，带螺钉接线端子，一体外壳结构
△ IP 44 CEE / IEC Plug: screwed terminals, shell of integrated structure

16	3	UKS-A134-4	UKS-A134-6	UKS-A134-9	UKS-A134-7	UKS-A134-10	UKS-A134-2
16	4	UKS-A144-4	UKS-A144-9	UKS-A144-6	UKS-A144-7	UKS-A144-10	UKS-A144-2
16	5	UKS-A154-4	UKS-A154-9	UKS-A154-6	UKS-A154-7	UKS-A154-10	UKS-A154-2
32	3	UKS-A234-4	UKS-A234-6	UKS-A234-9	UKS-A234-7	UKS-A234-10	UKS-A234-2
32	4	UKS-A244-4	UKS-A244-9	UKS-A244-6	UKS-A244-7	UKS-A244-10	UKS-A244-2
32	5	UKS-A254-4	UKS-A254-9	UKS-A254-6	UKS-A254-7	UKS-A254-10	UKS-A254-2

选型
Description

参数
Parameter


电流(A) Current(A) 极数(P) Pole(P)		16			32		
		3	4	5	3	4	5
尺寸 Dimension(mm)	a	142	144	147	186	186	180
	b	105.2	110.5	110.5	141	141	137
	c	59	69.4	76	81	81	89.5
	d	53	59	67	70	70	77
导线横截面积(mm²) 从最小至最大 Conductor cross section(mm²) Min. - max.		1.5	1.5	1.5	2.5	2.5	2.5
		-4	-4	-4	-10	-10	-10

插头 Plug


产品外观
Photo



外形尺寸
Dimension

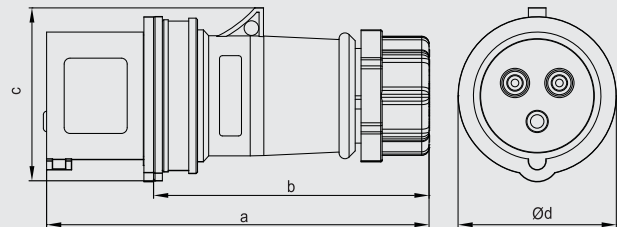

B



		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	2h

△ IP 44 CEE / IEC 插头，带螺钉接线端子，省时外壳结构
△ IP 44 CEE / IEC Plug: screwed terminals, enclosure with thread lock and safety slide

16	3	UKS2-A134-4	UKS2-A134-6	UKS2-A134-9	UKS2-A134-7	UKS2-A134-10	UKS2-A134-2
16	4	UKS2-A144-4	UKS2-A144-9	UKS2-A144-6	UKS2-A144-7	UKS2-A144-10	UKS2-A144-2
16	5	UKS2-A154-4	UKS2-A154-9	UKS2-A154-6	UKS2-A154-7	UKS2-A154-10	UKS2-A154-2
32	3	UKS2-A234-4	UKS2-A234-6	UKS2-A234-9	UKS2-A234-7	UKS2-A234-10	UKS2-A234-2
32	4	UKS2-A244-4	UKS2-A244-9	UKS2-A244-6	UKS2-A244-7	UKS2-A244-10	UKS2-A244-2
32	5	UKS2-A254-4	UKS2-A254-9	UKS2-A254-6	UKS2-A254-7	UKS2-A254-10	UKS2-A254-2

选型
Description



参数
Parameter

电流(A) Current(A)		16			32		
极数(P) Pole(P)		3	4	5	3	4	5
尺寸 Dimension(mm)	a	130.5	135.5	140.5	157.5	157.5	167.5
	b	94	99	104	112	112	122
	c	59	67.5	75.8	81	81	89
	d	54	60	68	71.3	71.3	77.8
导线横截面积(mm²)		1.5	1.5	1.5	2.5	2.5	2.5
从最小至最大		-4	-4	-4	-10	-10	-10
Conductor cross section(mm²)							
Min. - max.							

插头 Plug

产品外观
Photo

外形尺寸
Dimension

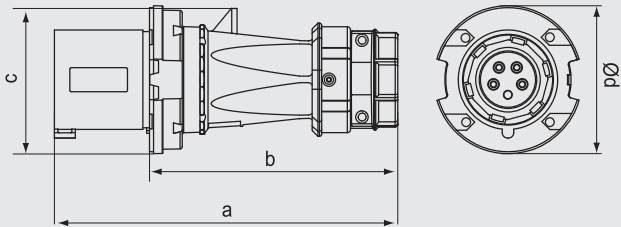

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	2h

▲ IP 44 CEE / IEC 插头，带外部电缆紧固装置及耐高温接触载体，插销表面镀镍
▲ IP 44 CEE / IEC Plug: external cable grip, highly heat resistant contact carrier, nickel plated contacts

63	3	UKS-A334-4	UKS-A334-6	UKS-A334-9	UKS-A334-7
63	4	UKS-A344-4	UKS-A344-9	UKS-A344-6	UKS-A344-7
63	5	UKS-A354-4	UKS-A354-9	UKS-A354-6	UKS-A354-7

选型
Description

参数
Parameter


电流(A) Current(A)		63		
极数(P) Pole(P)		3	4	5
尺寸 Dimension(mm)	a	238.3	238.3	238.3
	b	172.3	172.3	172.3
	c	100.7	100.7	100.7
	d	102.5	102.5	102.5
导线横截面积(mm ²)		6	6	6
从最小至最大 Conductor cross section(mm ²) Min. - max.		-25	-25	-25

插头 Plug


产品外观
Photo



外形尺寸
Dimension

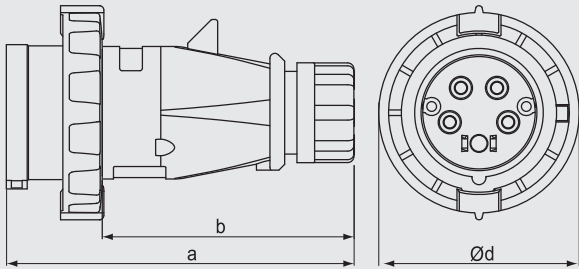

B



		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100- 300 Hz			>50 - 500 V a. 300- 500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	2h

选型
Description

♦♦ IP 67 CEE / IEC 插头，带螺钉接线端子，一体外壳结构								
♦♦ IP 67 CEE / IEC Plug: screwed terminals, shell of integrated structure								
16	3	UKS-A136-4	UKS-A136-6	UKS-A136-9	UKS-A136-7	UKS-A136-10	UKS-A136-2	
16	4	UKS-A146-4	UKS-A146-9	UKS-A146-6	UKS-A146-7	UKS-A146-10	UKS-A146-2	
16	5	UKS-A156-4	UKS-A156-9	UKS-A156-6	UKS-A156-7	UKS-A156-10	UKS-A156-2	
32	3	UKS-A236-4	UKS-A236-6	UKS-A236-9	UKS-A236-7	UKS-A236-10	UKS-A236-2	
32	4	UKS-A246-4	UKS-A246-9	UKS-A246-6	UKS-A246-7	UKS-A246-10	UKS-A246-2	
32	5	UKS-A256-4	UKS-A256-9	UKS-A256-6	UKS-A256-7	UKS-A256-10	UKS-A256-2	

参数
Parameter



电流(A) Current(A)		16			32		
极数(P) Pole(P)		3	4	5	3	4	5
尺寸 Dimension(mm)	a	142	144	147	186	186	180
	b	97.2	102.5	102.5	133	133	129
	d	70	78	87	94	94	101
导线横截面积(mm²)		1.5	1.5	1.5	2.5	2.5	2.5
从最小至最大		-4	-4	-4	-10	-10	-10
Conductor cross section(mm²)							
Min. - max.							

插头 Plug

产品外观
Photo



外形尺寸
Dimension

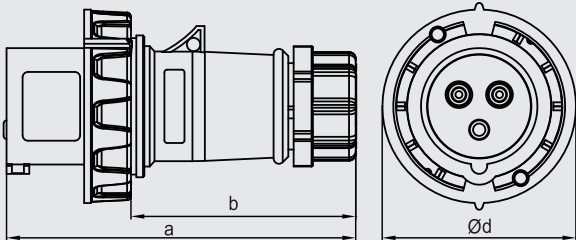

电流 极数
Current Pole

110 V
50 a. 60 Hz

3P 4P 5P
4h 4h 4h

230 V
50 a. 60 Hz

3P 4P 5P
6h 9h 9h

400 V
50 a. 60 Hz

3P 4P 5P
9h 6h 6h

500 V
50 a. 60 Hz

3P 4P 5P
7h 7h 7h

>50 -
500 V
100-
300 Hz

3P 4P 5P
10h 10h 10h

>50 -
500 V
a. 300-
500 Hz

3P 4P 5P
2h 2h 2h

♦♦ IP 67 CEE / IEC 插头，带螺钉接线端子，省时外壳结构
♦♦ IP 67 CEE / IEC Plug: screwed terminals, enclosure with thread lock and safety slide

16	3	UKS2-A136-4	UKS2-A136-6	UKS2-A136-9	UKS2-A136-7	UKS2-A136-10	UKS2-A136-2
16	4	UKS2-A146-4	UKS2-A146-9	UKS2-A146-6	UKS2-A146-7	UKS2-A146-10	UKS2-A146-2
16	5	UKS2-A156-4	UKS2-A156-9	UKS2-A156-6	UKS2-A156-7	UKS2-A156-10	UKS2-A156-2
32	3	UKS2-A236-4	UKS2-A236-6	UKS2-A236-9	UKS2-A236-7	UKS2-A236-10	UKS2-A236-2
32	4	UKS2-A246-4	UKS2-A246-9	UKS2-A246-6	UKS2-A246-7	UKS2-A246-10	UKS2-A246-2
32	5	UKS2-A256-4	UKS2-A256-9	UKS2-A256-6	UKS2-A256-7	UKS2-A256-10	UKS2-A256-2

选型
Description

参数
Parameter


电流(A) Current(A)	16			32		
极数(P) Pole(P)	3	4	5	3	4	5
尺寸 Dimension(mm)	a	b	d	a	b	d
	130.5	135.5	140.5	157.5	157.5	167.5
	84	89	94	104	104	114
	72.3	78	87	93	93	100
导线横截面积(mm²) 从最小至最大 Conductor cross section(mm²) Min. - max.	1.5 -4	1.5 -4	1.5 -4	2.5 -10	2.5 -10	2.5 -10

插头 Plug


产品外观
Photo



外形尺寸
Dimension

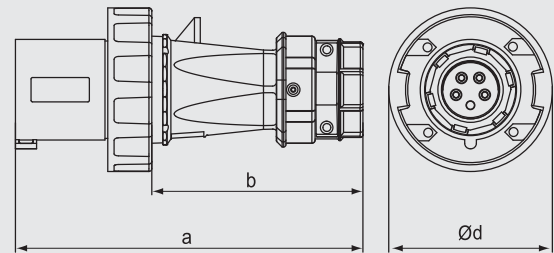

B



电流 极数
Current Pole

110 V
50 a. 60 Hz

230 V
50 a. 60 Hz

400 V
50 a. 60 Hz

500 V
50 a. 60 Hz

>50 -
500 V
100-
300 Hz

>50 -
500 V
a. 300-
500 Hz

3P 4P 5P
4h 4h 4h

3P 4P 5P
6h 9h 9h

3P 4P 5P
9h 6h 6h

3P 4P 5P
7h 7h 7h

3P 4P 5P
10h 10h 10h

3P 4P 5P
2h 2h 2h

♦♦ IP 67 CEE / IEC 插头，带外部电缆紧固装置及耐高温接触载体，插销表面镀镍
♦♦ IP 67 CEE / IEC Plug: external cable grip, highly heat resistant contact carrier, nickel plated contacts

63	3	UKS-A336-4	UKS-A336-6	UKS-A336-9	UKS-A336-7
63	4	UKS-A346-4	UKS-A346-9	UKS-A346-6	UKS-A346-7
63	5	UKS-A356-4	UKS-A356-9	UKS-A356-6	UKS-A356-7
125	3	UKS-A436-4	UKS-A436-6	UKS-A436-9	UKS-A436-7
125	4	UKS-A446-4	UKS-A446-9	UKS-A446-6	UKS-A446-7
125	5	UKS-A456-4	UKS-A456-9	UKS-A456-6	UKS-A456-7

选型
Description

参数
Parameter



电流(A) Current(A) 极数(P) Pole(P)		63			125		
		3	4	5	3	4	5
尺寸 Dimension(mm)	a	238.3	238.3	238.3	291.1	291.1	291.1
	b	155.3	155.3	155.3	210	210	210
	d	112.2	112.2	112.2	131	131	131
导线横截面积(mm²) 从最小至最大 Conductor cross section(mm²) Min. - max.		6	6	6	25	25	25
		-25	-25	-25	-70	-70	-70

插头 Plug

产品外观
Photo



外形尺寸
Dimension

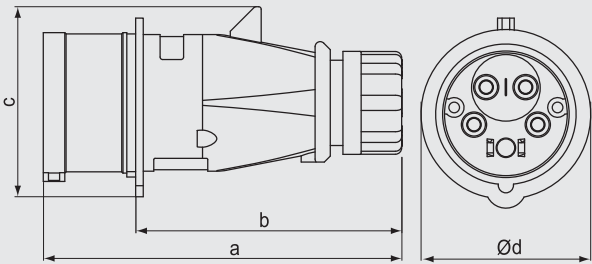

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	2h

▲ IP 44 CEE / IEC 相位转换插头，带螺钉接线端子，一体外壳结构
▲ IP 44 CEE / IEC Phase inverter plug: screwed terminals, shell of integrated structure

16	4	UKS-G144-9	UKS-G144-6
16	5	UKS-G154-9	UKS-G154-6
32	4	UKS-G244-9	UKS-G244-6
32	5	UKS-G254-9	UKS-G254-6

选型
Description

参数
Parameter


电流(A) Current(A)		16		32	
极数(P) Pole(P)		4	5	4	5
尺寸 Dimension(mm)	a	144	147	186	180
	b	110.5	110.5	141	135
	c	69.4	76	81	89.5
	d	59	67	70	77
导线横截面积(mm²)		1.5	1.5	2.5	2.5
从最小至最大 Conductor cross section(mm²) Min. - max.		-4	-4	-10	-10

插头 Plug


产品外观
Photo



外形尺寸
Dimension

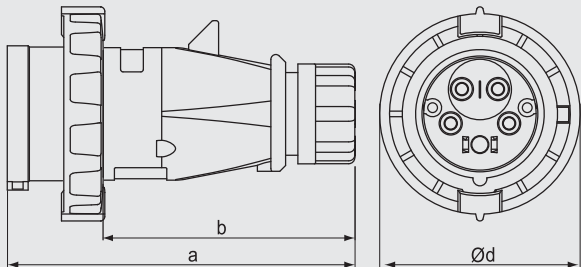

B



		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	2h

♦♦ IP 67 CEE / IEC 相位转换插头，带螺钉接线端子，一体外壳结构
♦♦ IP 67 CEE / IEC Phase inverter plug: screwed terminals, shell of integrated structure

16	4	UKS-G146-9	UKS-G146-6
16	5	UKS-G156-9	UKS-G156-6
32	4	UKS-G246-9	UKS-G246-6
32	5	UKS-G256-9	UKS-G256-6

选型
Description

参数
Parameter

电流(A) Current(A)		16		32	
极数(P) Pole(P)		4	5	4	5
尺寸 Dimension(mm)	a	144	147	186	180
	b	102.5	102.5	133	129
	d	78	87	94	101
导线横截面积(mm²)		1.5	1.5	2.5	2.5
从最小至最大 Conductor cross section(mm²) Min. - max.		-4	-4	-10	-10