



COVEFLEX TREBLE

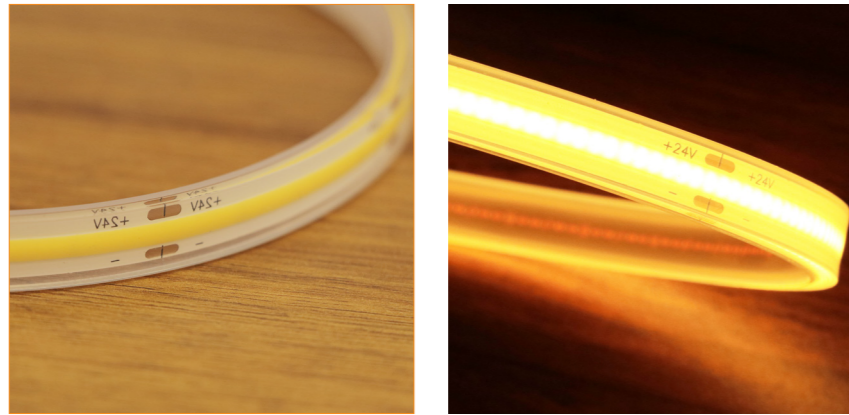


- Totally dot-free light without profiles or PC covers.
- High lumen and fancy looking by the unique design.
- One BIN Only ensures perfect color consistency.
- SDCM 3.
- Durable IP67.

DIMENSION

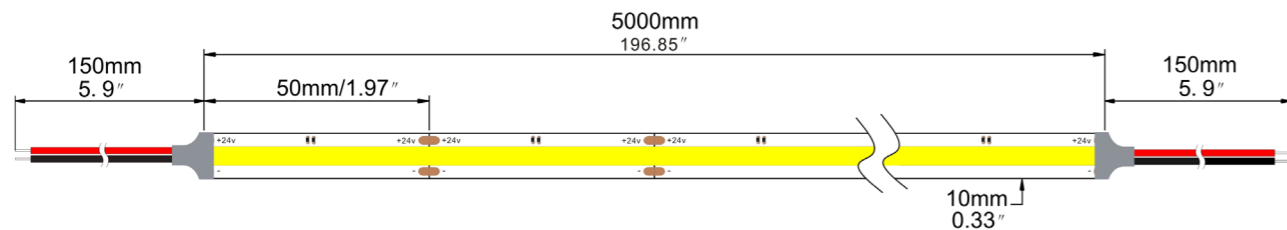

Electrical data

Lumen efficiency	100lm/w(4000K)
Ra	Ra90
SMD Type	COB
LEDs/m	480LEDs/m
Max current/LED	10.4mA@15W/M
Voltage	DC24V(12V optional; ± 0.5V)
Width	10mm
Unit cut	50mm
Storage Temperature	-25°C / -13°F _{min} , 60°C / 149°F _{max}
LED PIN Temperature	Max.65°C / 149°F
Life Span	>54000H
Waterproof rate	IP67
Warranty	5 Years



- Glossy and perfect line
- Wider beam angle
- More efficient cooling
- Flexibility of 60mm bending radius
- High CRI 90+
- Slim homogeneous light solution

(Lm/m)

CCT \ Power	2700K	3000K	4000K	6500K	Max. Run Length
5W/M	440	470	520	510	5M
10W/M	870	920	1030	1020	5M
15W/M	1250	1350	1470	1460	5M

LIFESPAN >54000H

INDOOR

WARRANTY 5 YEARS



ONE BIN ONLY
Color consistency
Today and tomorrow

ORDER CODE

SERIES NAME	COLOR	LENGTH	POWER
TREBLE	27=2700K	05000=5M/196.85"	050=5W
	30=3000K		100=10W
	40=4000K		150=15W
	65=6500K		


Example
TREBLE-27-05000-050:
COVEFLEX TREBLE, 2700K, 5M/reel,
5W/m.

PROFILES

Popular					
Cabinet					
Round					
Low and flat					
High and flat					

- The profiles can be ordered separately or assembled with strip.
- The strip lumen output will reduce about 15% with clear cover.
- The strip lumen output will reduce about 25% with diffuse cover.
- Opal/ lens cover is optional, please check case by case.
- Standard available lengths are 1mtr. & 2mtr.
- Connector/cable/product lengths can be customized, please check case by case.

Installation

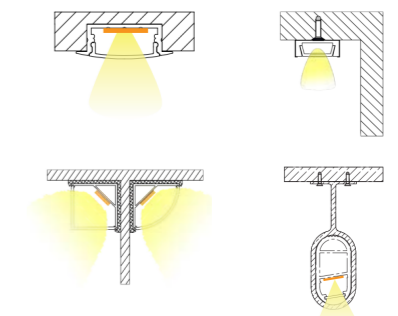

DRIVER




Order code: LRS-150-24
85-132VAC/ 170-264VAC
by switch DC24V 150W
IP20, global certification.

Order code: XLG-150-24-A
AC100-305V DC24V 150W
IP67, Global certification.
Non dimmable.

Order code: ELG-150-24B
AC100-305V DC24V 150W
IP67, Global certification.
3in1 dimming function: 0-10Vdc,
10V PWM signal and resistance.

Order code: ELG-150-24DA
AC100-305V DC24V 150W
IP67, Global certification
Dali control technology.

WIRING

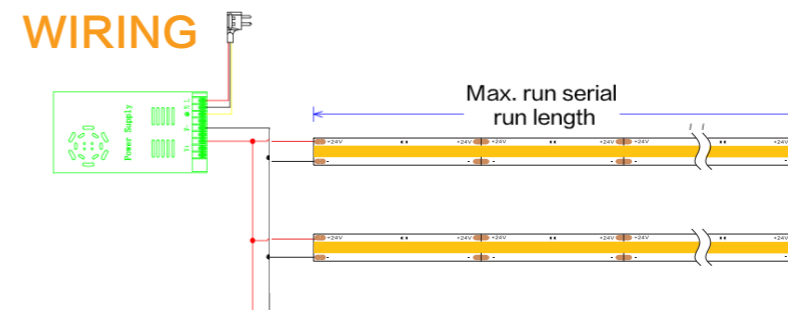

-Max. connection length depends on the wattage of the power supply and LED strip.

-Max. length per circuit is 5m, if it exceeds 5m, please split into multiple circuits.

-Please contact us if >150W power supply is needed.