

# HSE ROHS


## IDC Connector Specifications

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°cP1

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PBT(UL94V-0)

Wire Specifications  
 Insulator Material:PVC  
 Conductor:7/0.127mm(Tin Plated Copper)

Testing  
 Contact Resistance:3Ω Max.  
 Insulation Resistance:10MΩ Min.  
 Withstand Voltage:DC300V, 5second

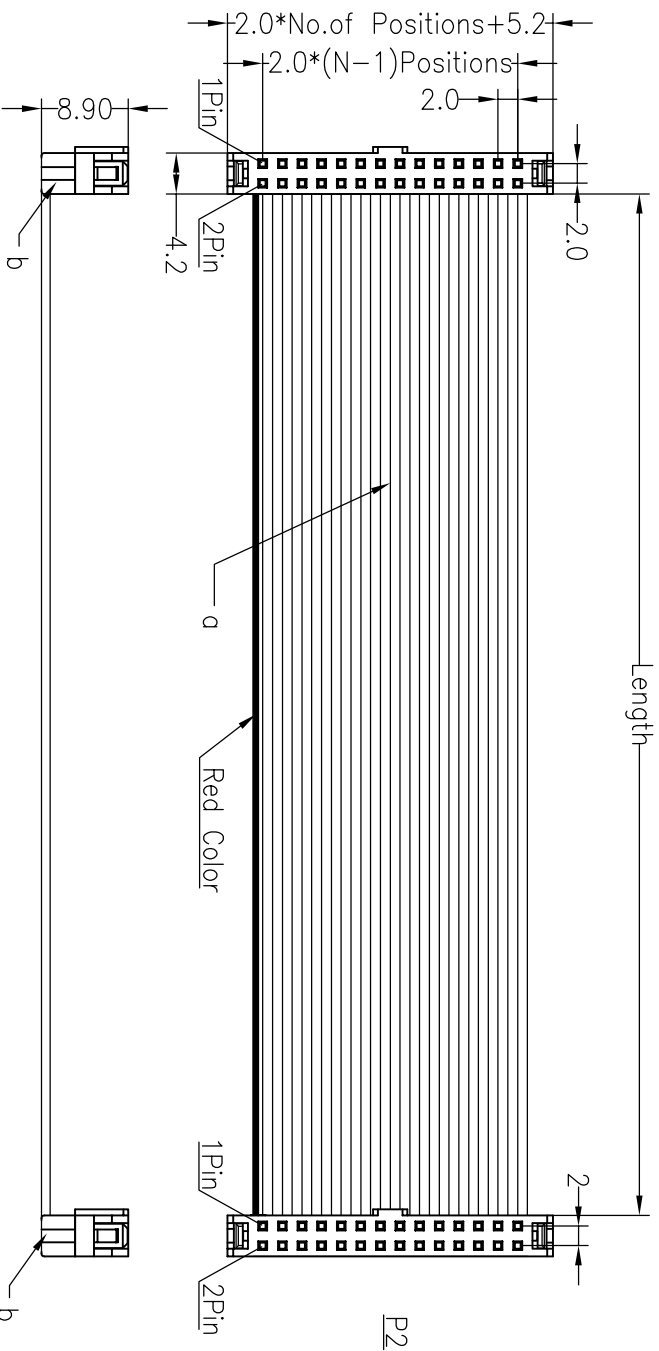

## Ordering Information

F22A XX XX A A B XXX 01

No.of Pins  
 4P~64P  
 Contact Plating  
 G0:Gold Flash  
 S0:Gold Flash/Tin  
 SN:Tin  
 IDC Color  
 B=Black  
 G=Grey  
 Length

b	2.00 IDC NPin 两件式 单接触	2	PCS
a	UL2651 28AWG PH1.00 NPin Wires Red Marking Grey Side	Length	MM
NO. Part No.		Q'ty	UNIT
Specification			

Length	Tolerance
≤100	±3
100~500	±5
>500	±10

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

OPERATION	DRAW	SCALE	FIT	PART NO.
X.X	YYuSheng	UNIT	mm	
X.XX	CHECK	SIZE	A4	F22AXXXXXAABXXXX01
X:XXX	±0.10	SHEET	1/1	
Angle	±3'	PROJ.		
DIM	TOL			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	TITLE:
A0	2012.03.28	NEW DRAWING			2.00 IDC TO 2.00 IDC Flt Cable